


## Zidni provodnik za cevi sa elastičnim zaptivačima dvodelni (za naknadnu ugradnju)

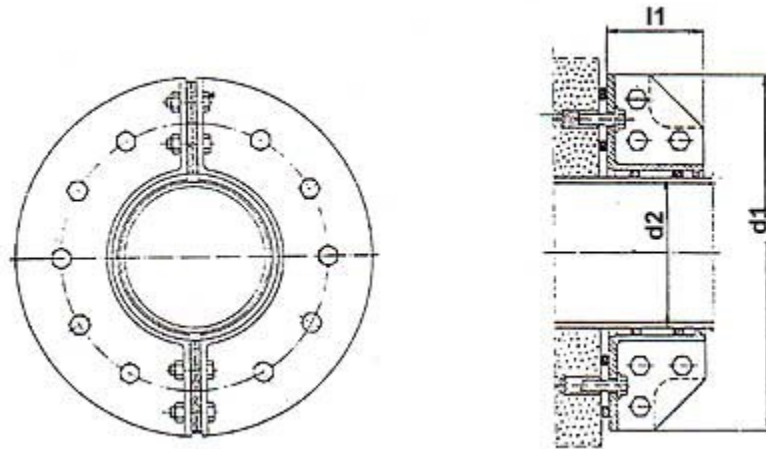

d1	Dn	40	50	65	80	100	125	150	175	200	250	300	350	400	450
	DIN	44.5	57	76.1	88.9	108	133	159	191	216	267	318	368	419	470
	ISO	48.3	60.3	76.1	88.9	114.3	139.7	168.3	177.8	219.1	273	323.9	355.6	406.4	457.2
	d2	345	360	375	390	410	435	460	490	515	565	625	670	725	775
	l1	130	130	130	130	130	130	130	130	130	130	130	130	130	130
	n	4	4	4	4	6	6	6	6	6	6	6	6	8	8
	kg	14	14	15	16	17	18	19	20	21	23	26	33	37	40
	m	0.016	0.017	0.019	0.020	0.022	0.025	0.028	0.032	0.035	0.042	0.050	0.058	0.067	0.077
d1	DN	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600		
	DIN	521	622	720	820	920	1020	1120	1220	1320	1420	1520	1620		
	ISO	508	609.6	711.2	812.8	914.4	1016	1120	1220	1320	1420	1520	1620		
	d2	825	920	1020	1120	1230	1330	1430	1530	1630	1730	1830	1930		
	l1	130	130	130	130	130	130	130	130	130	130	130	130		
	n	8	10	10	12	12	16	16	16	20	20	20	20		
	kg	43	48	52	68	80	86	95	100	110	115	125	132		
	m	0.088	0.112	0.136	0.164	0.194	0.228	0.263	0.301	0.342	0.385	0.432	0.481		